




**Triband antenna UMTS, GSM900 and
GSM1800 with suction cup holder**




Ideal antenna for notebooks with radio data modem or traditional telephone cards. Supports UMTS with HSDPA, HSUPA and GSM with EDGE/GPRS. Gain 7dBi, length 45cm. Includes 80cm cable with RP-SMA connector and suction cup holder for mounting on a window pane.

| Electrical specification | |
|---------------------------------|------------------------------------|
| Frequency range | 860~960/1710~1880/ 1870~1950MHz |
| Peak Gain | 7 dBi |
| VSWR | 2.0:1 max |
| Impedance | 50Ω |
| Polarisation | Linear vertical |
| | |

| Mechanical characteristics | |
|-----------------------------------|--------------|
| Operating Temperature | -20°~ +65° |
| Color | Black |
| Material | PE/PP |
| Cable | RG-316*800mm |
| Whip length | 443 mm |

| Connector | p/n |
|------------------|------------|
| RPSMA | 60052 |
| SMA | 60052.SMA |

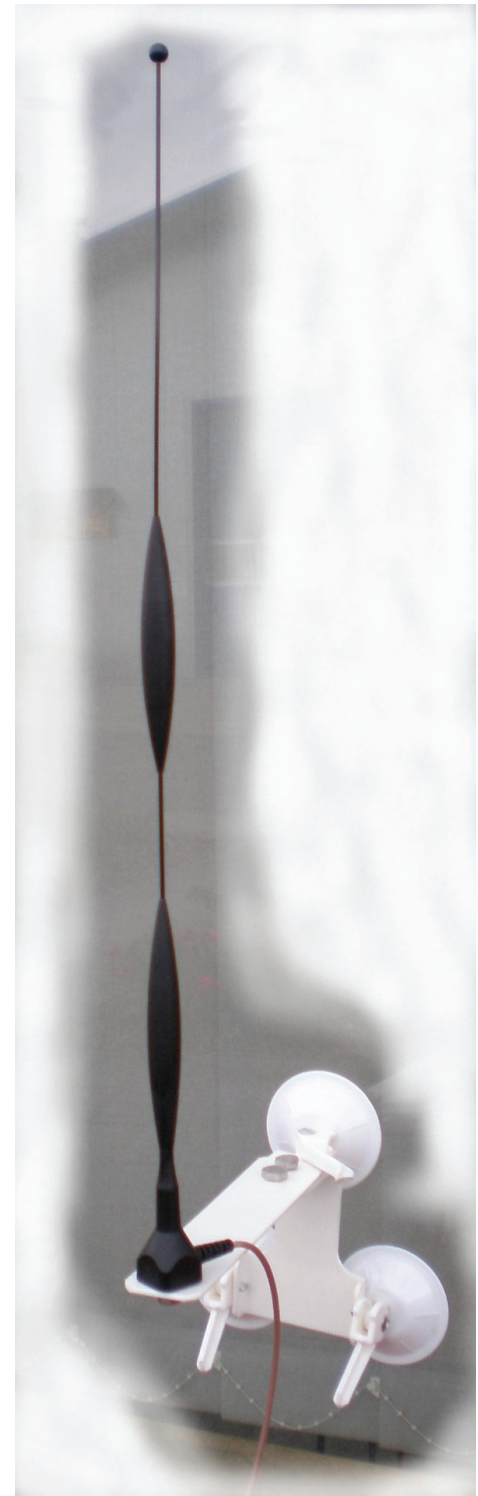

WiMo Antennen und Elektronik GmbH


Am Gäxwald 14, D-76863 Herxheim Tel. (07276) 96680 FAX 9668-11

<http://www.wimo.com>


e-mail: info@wimo.com




Triband antenna UMTS, GSM900 and GSM1800 with suction cup holder



Return loss

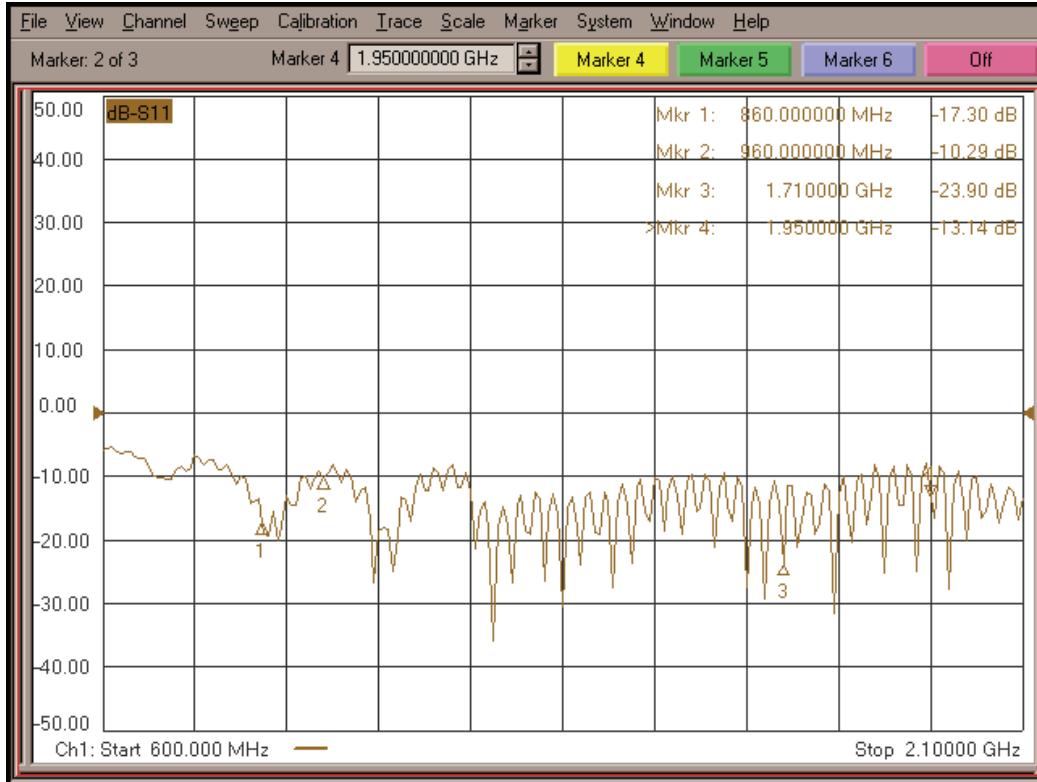

VSWR

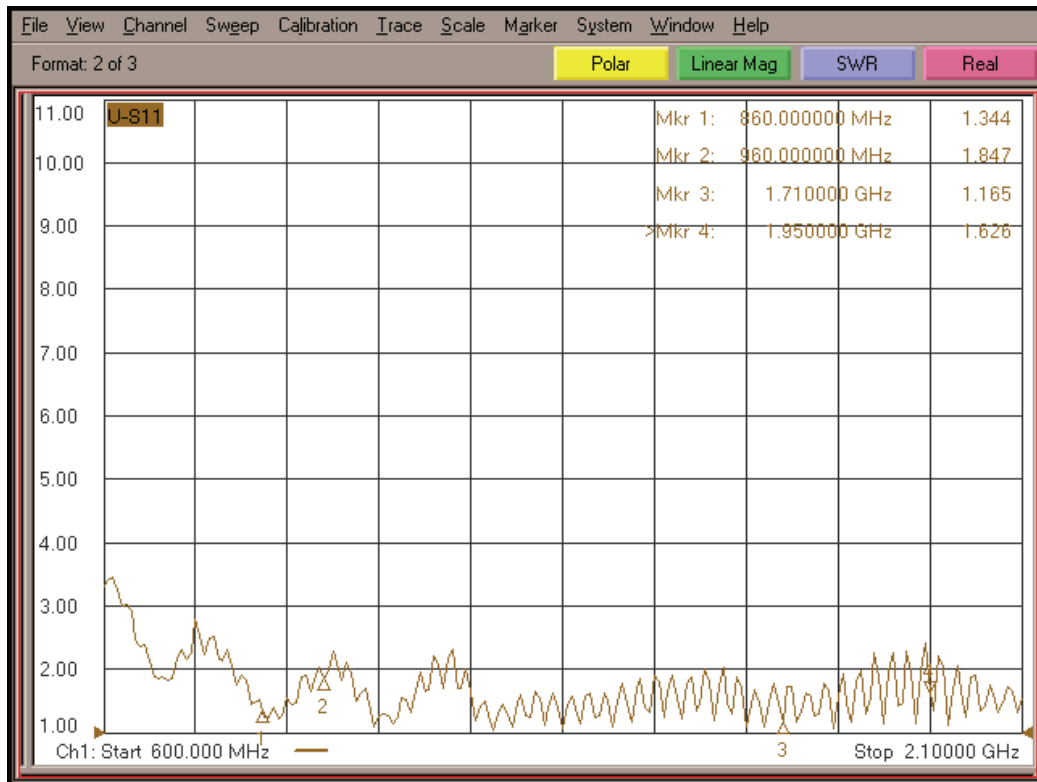

WiMo Antennen und Elektronik GmbH

Am Gäxwald 14, D-76863 Herxheim Tel. (07276) 96680 FAX 9668-11

<http://www.wimo.com>

e-mail: info@wimo.com