

## CT-133 GPS CONNECTION CABLE

Thank you very much for your purchase of the CT-133 GPS Connection Cable.

The CT-133 is especially designed to connect the CT-136 (with FGPS-2) GPS to your FTM-350R/E transceiver.

### ACCESSORIES


GPS Connection Cable .....	1
Holder Plate .....	1
Double Face Adhesive .....	1
Screw .....	1
Instruction Manual .....	1

### PRECAUTIONS



- Turn the transceiver off before connecting the Flat cable from the Front Panel to the connector on the Printed Circuit Board in the CT-133.
- Do not expose the CT-133 to long periods of direct sunlight, or high temperatures from heating appliances.
- Do not drop the CT-133; strong impacts can damage the internal components.

### INSTALLATION


1. Remove the two screws affixing the Plastic cover, and then remove the cover from the Front Panel.

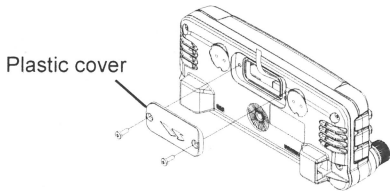

2. Attach the Flat cable from the Front Panel to the connector on the Printed Circuit Board in the CT-133.
3. Attach the CT-133 to the Front Panel using the previously removed two screws.

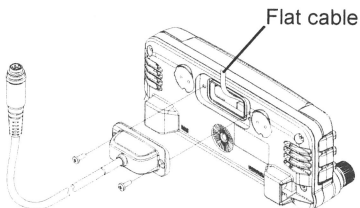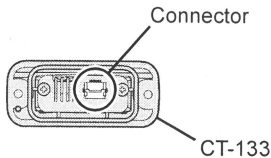

4. Mount the supplied Holder Plate to the CT-136 (with FGPS-2) using the supplied screw, and then affix the supplied double face adhesive to the Holder Plate.

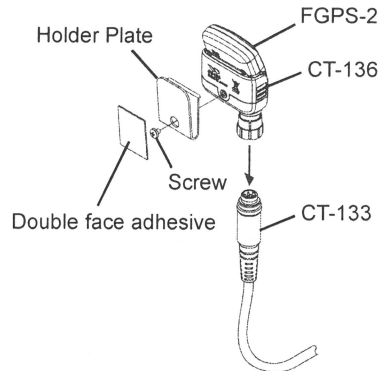

5. The installation is now complete.