

VP165/24

Vertical Flat Panel Antenna, 65 deg, 9 dBi




Specifications

Type	directional flat panel antenna
Polarization	vertical
Frequency	2400-2485 MHz
Impedance	50 ohm
VSWR	<1.5:1
Gain	9 dBi
HPBW	azimuth 65° elevation 65°
Connector	(1) SMA female or (2) white RG58 3-10 m with male SMA connector
Power handling	20 W
Mount	wall mount with az/el tilt function included
Size	W 92 mm H 100 mm D 30 mm
Weight	160 g antenna only
Material	element - aluminium, brass radome - ABS
Color	white
Other	DC grounded


Product No

25165

Smarteq reserves the right to change specifications without prior notice.

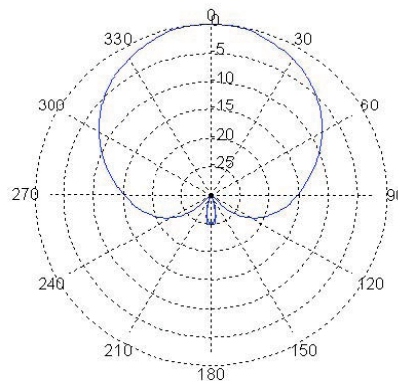

Azimuth (H-field) radiation pattern

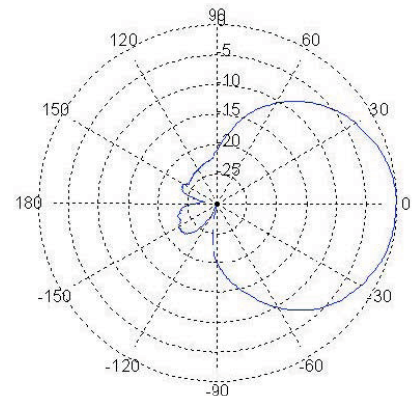

Elevation (E-field) radiation pattern

SMARTEQ™
■■■■■ antennas

550048C

Smarteq develops and supplies high-quality antennas and antenna systems for the wireless transfer of speech and data, communication to and from vehicles and machine to machine. Our staff is fully focused on developing high-performance antennas that will continue to set new standards of excellence that will exceed our customers' expectations

Smarteq Wireless AB

P.O. Box 4064 | SE-182 04 Enebyberg | Sweden

www.smarteq.com



Smarteq is certified according to
ISO/TS 16949, ISO 14001