


**Rundstrahlantenne für Deckenmontage WLAN /  
ISM**  
Best.Nr. 18607




### Rundstrahlantenne für Deckenmontage

Durch die von der Umgebung unbeeinflusste Abstrahlung direkt unter der Decke ideal zum Ausleuchten von größeren Räumen und Gängen. Vertikalpolarisation mit vertikalen Öffnungswinkel von etwa 40°, Gewinn 2 dBi. Anschluß SMA-Buchse, weißes Kunststoffgehäuse. Sehr unauffällig, sieht eher aus wie ein Rauchmelder. Durchmesser 115mm, Höhe 42mm, maximale Deckendicke 20mm. Kann durch die zusätzlich beiliegende Montageplatte auch anderweitig befestigt werden.

### Omni-directional radiator for ceiling mount

With the antenna mounted on the ceiling environmental influences are reduced to a minimum, making this antenna ideal for illumination of larger rooms and hallways (hotels, lobbies, offices etc.). Vertically polarized with vertical HPBW angle of 40°, Gain 2dBi. Connector SMA jack (female), white case. Very unobtrusive, looks similiar to a smoke detector. Diameter 115mm, height 42mm, max. ceiling thickness 20mm. Flexible mounting options with the included base plate.

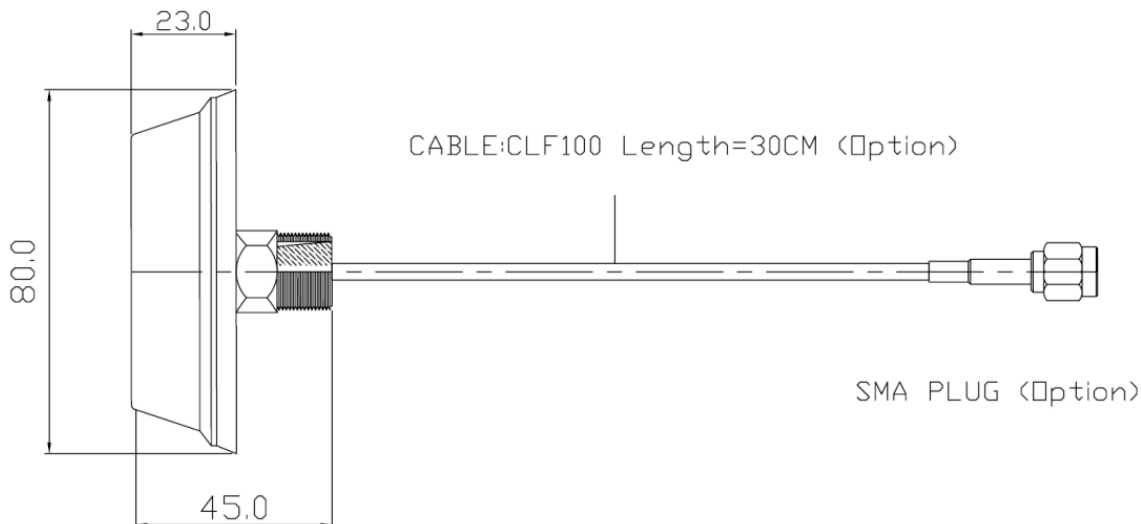

## WiMo Antennen und Elektronik GmbH


Am Gäxwald 14, D-76863 Herxheim Tel. (07276) 96680 FAX 9668-11

<http://www.wimo.com>



e-mail: [info@wimo.com](mailto:info@wimo.com)



**Rundstrahlantenne für Deckenmontage WLAN /  
ISM**  
Best.Nr. 18607



<b>Specification</b>	
Model No.	18607
Operating Frequency	2400-2500 MHz
Antenna Type	Ceiling
Gain	3 dBi
VSWR	< 1.8
Polarization	Linear Vertical
Temperature	-40 to +85 °C
Humidity	40% to 95% RH
Connector	SMA Female
Cable	LOW LOSS CLF100, length 30cm
Antenna Color	black or white
Dimension	80 dia. x 45mm

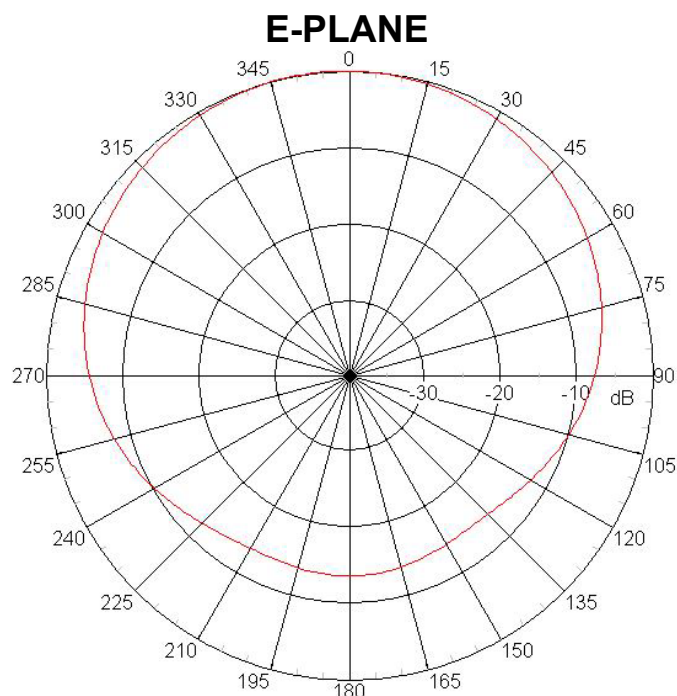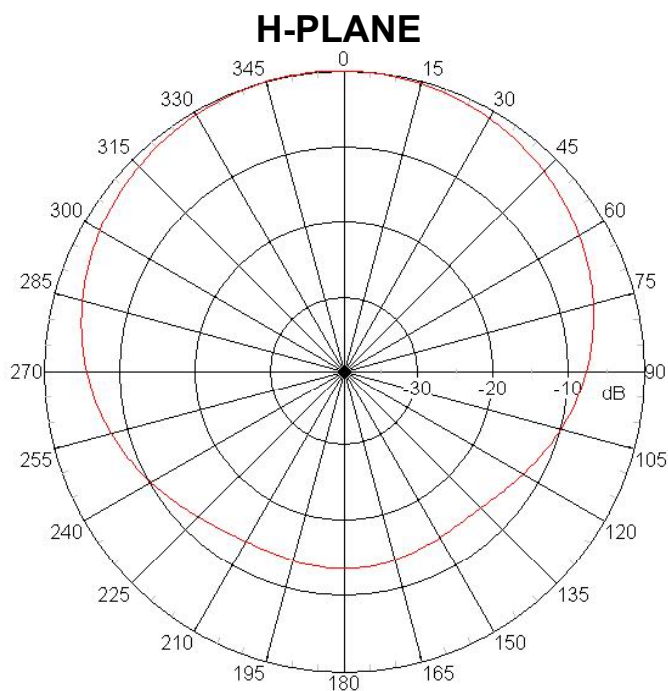

**WiMo Antennen und Elektronik GmbH**

Am Gäxwald 14, D-76863 Herxheim Tel. (07276) 96680 FAX 9668-11

<http://www.wimo.com>

e-mail: [info@wimo.com](mailto:info@wimo.com)